

SUBMITTAL DATA

MODEL XSD-55

2" DEEP WIND DRIVEN RAIN FIXED LOUVER

STANDARD CONSTRUCTION:

Frame: .060 Extruded Aluminum, 2.16" Deep

Blade: .060 Extruded Aluminum on approximately 0.938" centers.


Birdscreen: .50" x .050" Flattened Aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.

Finish: Mill Aluminum (Std.)

Minimum Size: 12 x 12

Maximum Single Section: 120"w x 84"h or 84"w x 120"h

Note: 10' max width

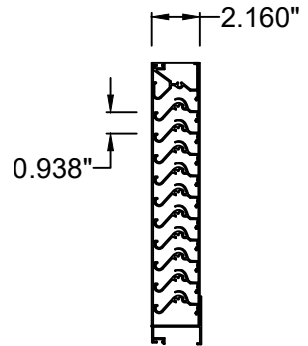


OPTIONS:


- Flanged Frame (1.50" std.), (1" std for shapes R_)
- Custom Flange (1", 2", or 3"), (1.5", 2", or 3" for shapes R_)
- Extended Sill
- Glazing Adapter (.50" or .75")
- Insect Screen (Other Screens Available, See Screen Page)
- Filter Racks (no screen)
- Security Bars
- Hinged Sub Frame
- Welded Construction (Wind Load +/- 50 psf)
- Blank-off, Alum., non-insulated, no screen, non-removable
- Blank-off, Alum., non-insulated, with bird screen or insect screen
- Blank-off, Alum., insulated double wall, with bird screen, removable
- Blank-off, Alum., insulated double wall, no screen, non-removable

AVAILABLE FINISHES:

- Durable Polyester (AAMA 2604)
- 70% PVDF Fluoropolymer (AAMA 2605)
- Yellow Primer
- Clear Anodize
- Dark Bronze Anodize

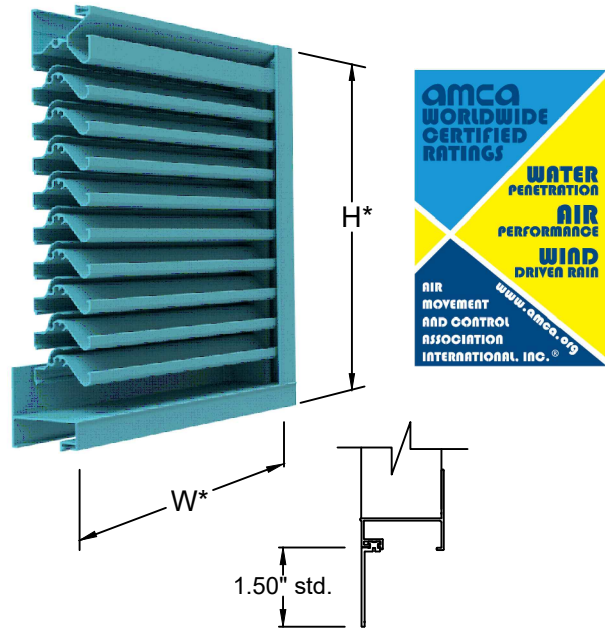

OPTIONAL FLANGE
(except R_Shapes, 1" optional std)

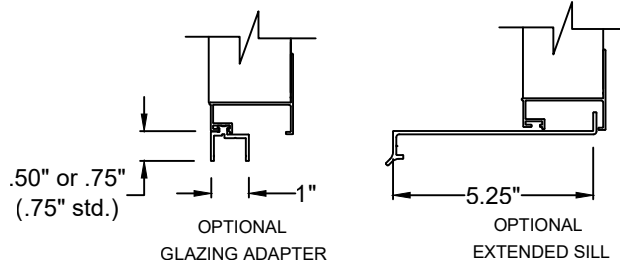

*Width and Height dimensions are approximately 1/4" under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.




3005 South Hickory Street
Chattanooga, Tennessee 37407
Tel: (423) 698-7715
Fax: (423) 698-6629
www.unitedenertech.com

MODEL XSD-55 (2" Deep Wind-Driven Rain Louver)

DRAWN BY: CLJ	DATE: November 2017	REV. DATE:	REV. NO.	APPROVED BY: MD	DWG. NO.: A-16b
------------------	------------------------	------------	----------	--------------------	--------------------


PERFORMANCE DATA

WATER PENETRATION

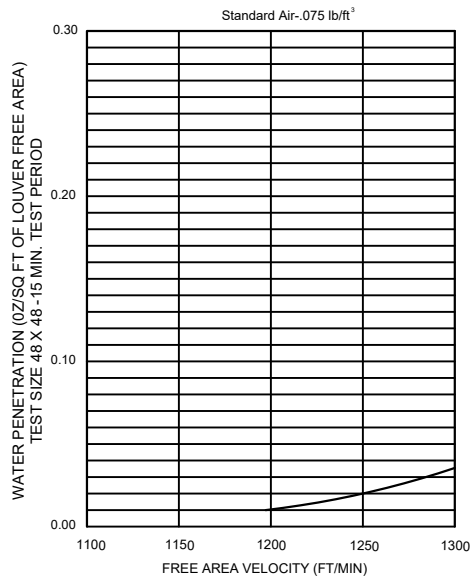

Beginning point of WATER PENETRATION
is
1195 fpm
free area velocity at .01 oz. of water penetration

AIR FLOW RESISTANCE

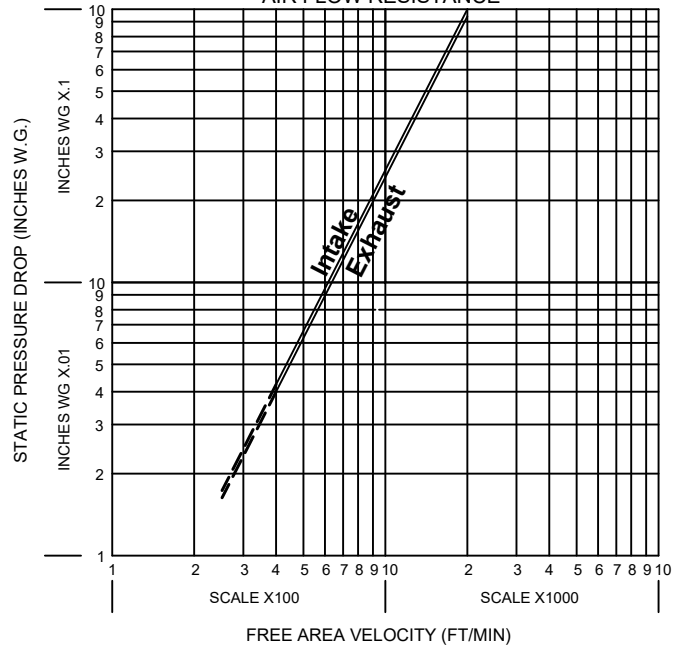

Based on STANDARD AIR-.075 lb. per cubic foot.
Ratings do not include the effects of screen.
Test size 48" x 48"

Louver Height Inches	XSD-55 FREE AREA IN SQ. FT.																		Louver Height Inches	
	Width - Inches																			
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114		120
12	0.24	0.43	0.59	0.76	0.92	1.09	1.25	1.42	1.58	1.74	1.91	2.07	2.24	2.40	2.56	2.73	2.89	3.06	3.22	12
18	0.46	0.75	1.03	1.31	1.60	1.88	2.16	2.45	2.73	3.02	3.30	3.58	3.87	4.15	4.44	4.72	5.00	5.29	5.57	18
24	0.65	1.05	1.45	1.85	2.26	2.66	3.06	3.46	3.86	4.26	4.66	5.06	5.46	5.87	6.27	6.67	7.07	7.47	7.87	24
30	0.84	1.35	1.87	2.38	2.90	3.42	3.93	4.45	4.96	5.48	5.99	6.51	7.03	7.54	8.06	8.57	9.09	9.60	10.12	30
36	1.04	1.67	2.31	2.95	3.59	4.23	4.86	5.50	6.14	6.78	7.42	8.06	8.69	9.33	9.97	10.61	11.25	11.88	12.52	36
42	1.23	1.99	2.75	3.50	4.26	5.02	5.78	6.54	7.29	8.05	8.81	9.57	10.33	11.08	11.84	12.60	13.36	14.11	14.87	42
48	1.40	2.26	3.12	3.97	4.83	5.69	6.55	7.41	8.27	9.13	9.99	10.85	11.71	12.57	13.43	14.29	15.15	16.01	16.87	48
54	1.61	2.60	3.59	4.58	5.57	6.56	7.55	8.54	9.52	10.51	11.50	12.49	13.48	14.47	15.46	16.45	17.44	18.43	19.42	54
60	1.78	2.87	3.96	5.06	6.15	7.25	8.34	9.43	10.53	11.62	12.71	13.81	14.90	16.00	17.09	18.18	19.28	20.37	21.46	60
66	2.00	3.23	4.47	5.70	6.93	8.16	9.39	10.62	11.86	13.09	14.32	15.55	16.78	18.01	19.25	20.48	21.71	22.94	24.17	66
72	2.16	3.49	4.82	6.15	7.49	8.82	10.15	11.48	12.81	14.14	15.47	16.80	18.13	19.46	20.79	22.12	23.45	24.78	26.12	72
78	2.38	3.84	5.31	6.77	8.23	9.70	11.16	12.62	14.09	15.55	17.01	18.48	19.94	21.40	22.87	24.33	25.79	27.26	28.72	78
84	2.55	4.12	5.68	7.25	8.82	10.39	11.95	13.52	15.09	16.66	18.22	19.79	21.36	22.93	24.50	26.06	27.63	29.20	30.77	84
90	2.77	4.48	6.18	7.89	9.59	11.30	13.01	14.71	16.42	18.12	19.83	21.53	23.24							
96	2.93	4.74	6.54	8.35	10.15	11.96	13.76	15.57	17.37	19.17	20.98	22.78	24.59							
102	3.15	5.09	7.02	8.96	10.90	12.84	14.77	16.71	18.65	20.59	22.52	24.46	26.40							
108	3.32	5.36	7.40	9.44	11.48	13.53	15.57	17.61	19.65	21.69	23.73	25.78	27.82							
114	3.54	5.72	7.90	10.08	12.26	14.44	16.62	18.80	20.98	23.16	25.34	27.52	29.70							
120	3.70	5.98	8.26	10.54	12.82	15.10	17.37	19.65	21.93	24.21	26.49	28.77	31.05							



United Enertech certifies that the XSD-55 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA certified rating seal applies to air performance ratings, water penetration, and wind driven rain ratings.

WIND-DRIVEN RAIN

75 mm/h (3 in/h) Rainfall & 13 m/s (29 mph) Wind Velocity				
Core Velocity fpm (m/s)	Ventilation Airflow cfm (m ³ /s)	Free Area Velocity fpm (m/s)	Effectiveness	AMCA Effectiveness Class
0 (0.0)	0 (0.00)	0 (0.0)	98.1	B
99 (0.5)	1066 (0.50)	194 (1.0)	95.2	B
196 (1.0)	2110 (1.00)	384 (1.9)	92.4	C
291 (1.5)	3132 (1.48)	570 (2.9)	89.8	C
395 (2.0)	4252 (2.01)	773 (3.9)	85.1	C

202.4 mm/h (8 in/h) Rainfall & 22 m/s (50 mph) Wind Velocity				
Core Velocity fpm (m/s)	Ventilation Airflow cfm (m ³ /s)	Free Area Velocity fpm (m/s)	Effectiveness	AMCA Effectiveness Class
0 (0.0)	0 (0.00)	0 (0.0)	87.8	C
94 (0.5)	1012 (0.48)	184 (0.9)	86.0	C
196 (1.0)	2110 (1.00)	384 (1.9)	83.9	C
298 (1.5)	3208 (1.51)	583 (3.0)	82.3	C

Test size 1m x 1m (39"x39")core
41-5/8"w x 41-13/16"h Nominal (1.057m x 1.062m)

Wind Driven Rain Penetration Classes	
Class	Effectiveness
A	1 to 0.99
B	0.989 to 0.95
C	0.949 to 0.80
D	Below 0.8

* Discharge Loss Intake		
Wind Velocity (mph)	Class	
	Intake	Exhaust
29	3	3
50	3	3

* Discharge loss coefficient is the theoretical air flow of an opening divided by the actual flow rate of a louver the same size.

Class	Discharge Loss Coefficient
1	0.4 and above
2	0.3 to 0.399
3	0.2 to 0.299
4	0.199 and below

(the higher the coefficient, the less resistance to airflow.)