



Specialty Louver Shapes

Circular and Semicircular Louvers

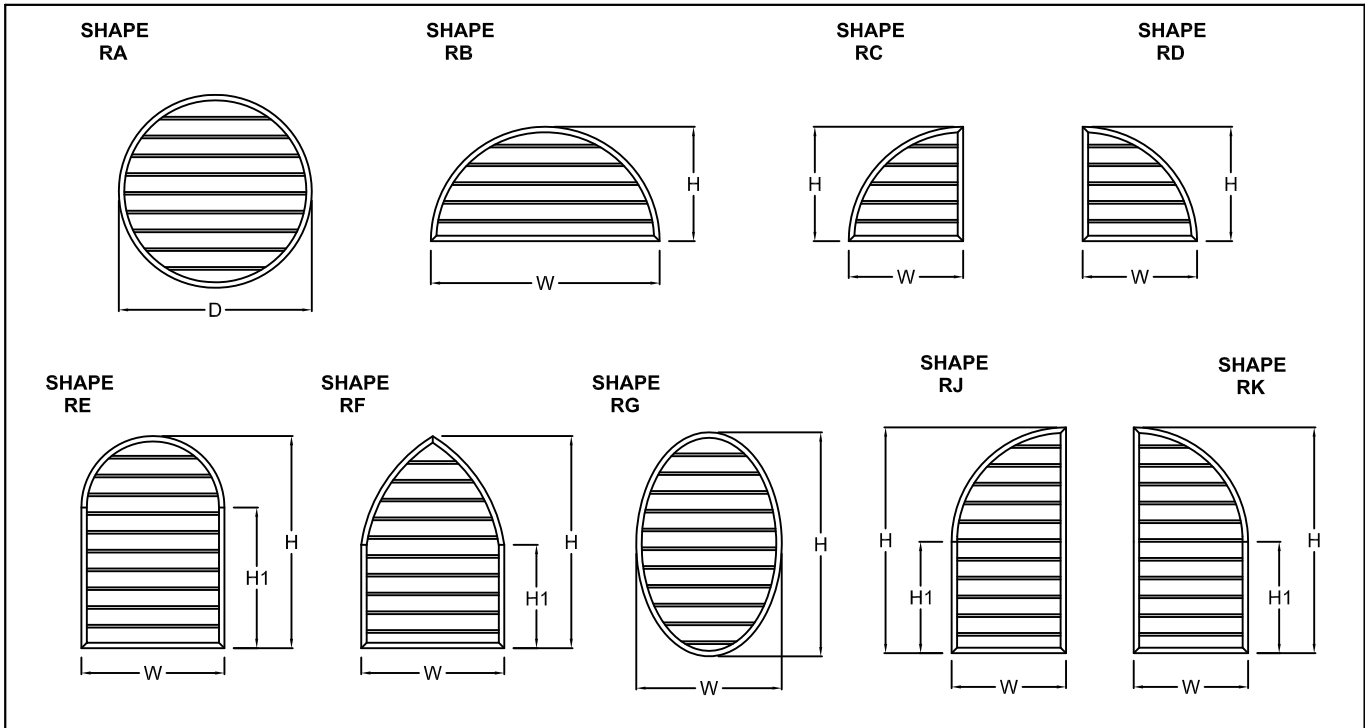

Notes:

- (1) Special shaped louvers are not AMCA tested for water penetration or air flow resistance.
- (2) Conservative air flows should be used when sizing louvers to help prevent water carry over.
- (3) Round shapes with optional flanged frame have a standard 1" flange.
- (4) Louvers are undersized 1/4" unless otherwise noted.



Qty.	Model	Shape	Size			Options/Accessories
			W or D	H	H1	

Project: _____

Location: _____

Contractor: _____

Design Specifier: _____

Due to continuing research, United Enertech reserves the right to change specifications without notice.



3005 South Hickory Street
 Chattanooga, Tennessee 37407
 Tel: (423) 698-7715
 Fax: (423) 698-6629
 www.unitedenertech.com

Specialty Louver Shapes (Circular and Semicircular Louvers)

DRAWN BY: MHM	DATE: 3-22-10	REV. DATE: 7-5-11	REV. NO.: 1	APPROVED BY: BGT	DWG. NO.: A-51
------------------	------------------	----------------------	----------------	---------------------	--------------------------