

### Application and Design:

The United Enertech Model NLS (No Loss Stackhead) was developed for vertical discharge of roof exhaust fans.

### Standard Construction:

6" [152mm] thru 10" [254mm] Diameter : 18 ga galvanized steel  
12" [305mm] thru 20" [508mm] Diameter: 16 ga galvanized steel  
20" [508mm] thru 24" [610mm] Diameter: 14 ga galvanized steel  
Note: Consult factory for larger sizes


Maximum Velocity = 5000 fpm

#### Note: E Dimension

6" [152mm] thru 14" [356mm] diameter, E = 6" [152mm]  
16" [406mm] thru 20" [508mm] diameter, E = 9" [229mm]  
22" [559mm] thru 24" [610mm] diameter, E = 12" [305mm]

### Options:

- ☐ Aluminum Construction
- ☐ 304 Stainless Steel Construction
- ☐ 316 Stainless Steel Construction
- ☐ Baked Powder Polyester coating
- ☐ Baked Powder Epoxy coating
- ☐ Heresite Phenolic Coating (brown)
- ☐ China Cap (Rain Shield)

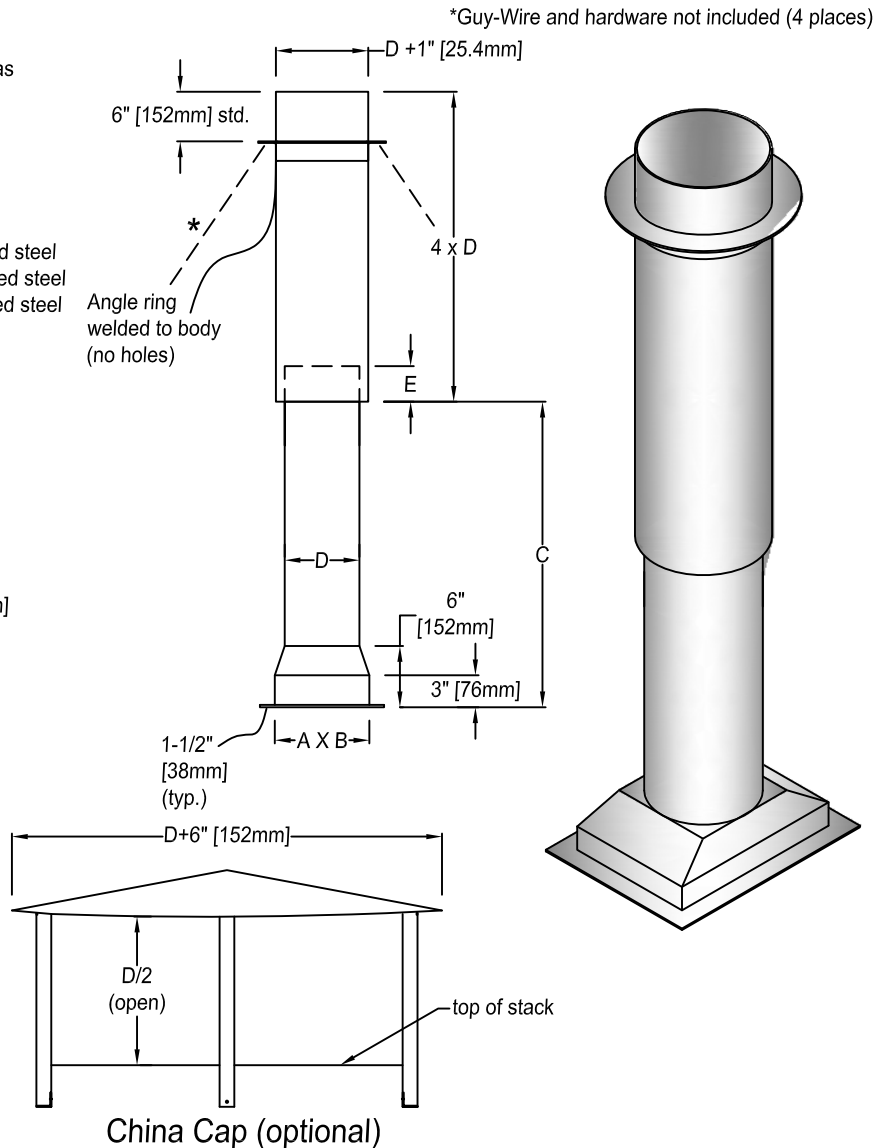

QTY	TAG	CFM	A	B	C	D	E

Due to continuing research, United Enertech reserves the right to change specifications without notice.

Job Name:	<input type="checkbox"/> <b>MODEL NLS (No Loss Stackhead)</b>		
Location:			
Architect:	DRAWN BY: CLJ	DATE: 6-29-06	REV. DATE: 3-28-13
Engineer:	REV. NO. 7	APPROVED BY: BGT	DWG. NO.: <b>B-15</b>
Contractor:			