

SOLARIS SERIES

STANDARD CONSTRUCTION:

OUTRIGGER & BRACKET:

- 0.25"(6.35mm) Aluminum (standard)
- 0.375"(9.53mm) Aluminum (optional)

BLADES:


0.108"(2.74mm) Aluminum Airfoil,
 1-1/2"(38mm) deep x 6-1/2"(165mm) wide positioned
 on a 35° angle on approximately 7-13/16"(198mm) centers.

FINISH:


mill aluminum (std.)

MAXIMUM SIZE:

72"(1829mm) Projection x 96"(2438mm) Length (single section)
 *Intermediate blade support may be required.

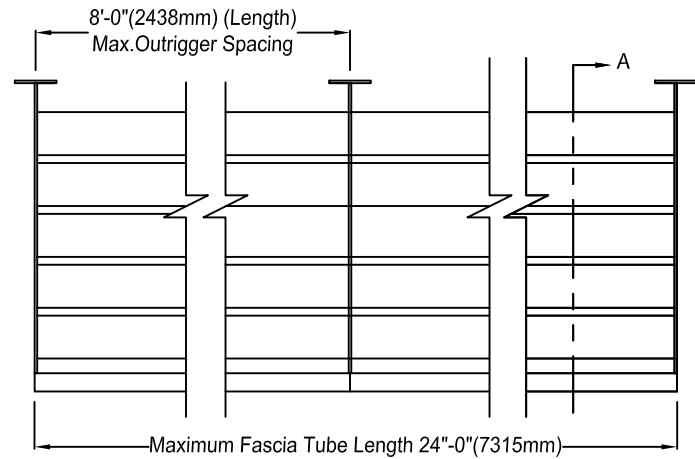

Inside and outside corners available

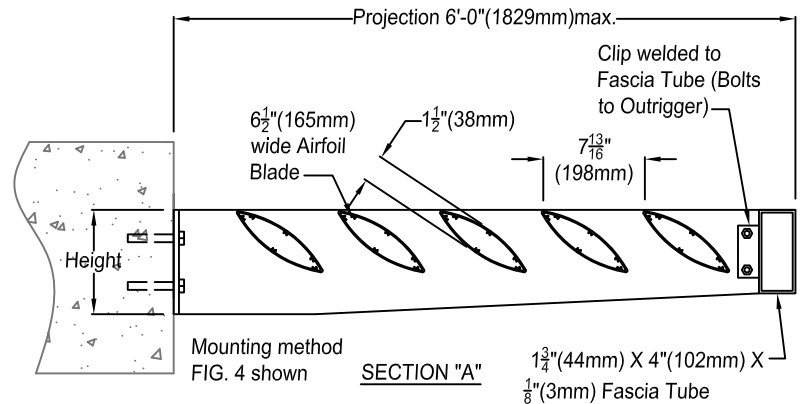

3 part specifications - see online at www.unitedenertech.com



Due to continuing research, United Enertech reserves the right to change specifications without notice.

QUANTITY	HEIGHT	LENGTH	PROJECTION	TAG



3005 South Hickory Street
 Chattanooga, Tennessee 37407
 Tel: (423) 698-7715
 Fax: (423) 698-6629
www.unitedenertech.com

SOLARIS SERIES

DRAWN BY: CLJ	DATE: 1-13-10	REV. DATE: 4-18-13	REV. NO. 7	APPROVED BY: BGT	DWG. NO.: C-4
------------------	------------------	-----------------------	---------------	---------------------	-------------------------