


RB-D Radial Blade Damper

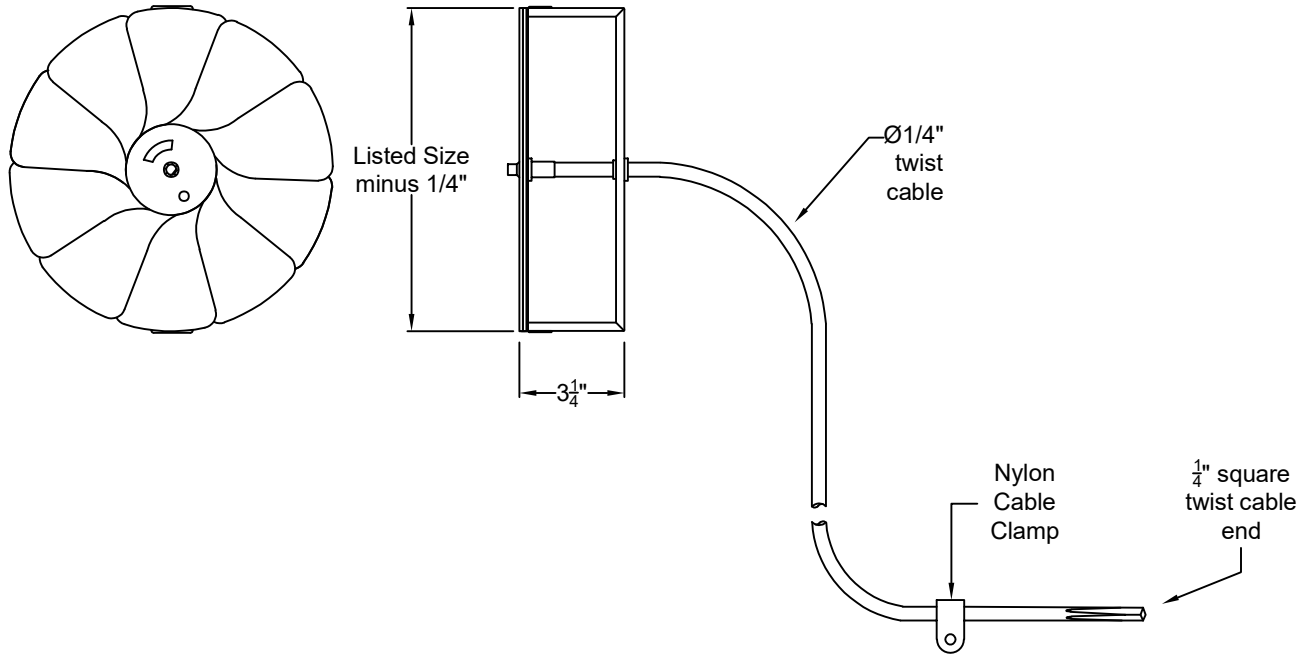

DESIGN FEATURES

- Damper Pivot will accept a rotary cable.
- Nylon cable clamp for field use equipped with 5/16" self-drilling hex screw.
- Easy installation as a singular comprehensive unit.
- Maximum recommended velocity of 1600 fpm.
- Operates within -40° to 240°F.
- Male 1/4" square twist cable end.

STANDARD CONSTRUCTION

- Galvannealed Steel
- Ø1/4" braided twist cable (2' standard)
- Male 1/4" square rotary cable end

OPTIONS

- Additional Cable length (12' max.)
- Aluminum Finish build
- Stainless Steel build
- Flat Head screwdriver-adjusted cable tip

Available Sizes

Ø6"
Ø7"
Ø8"
Ø10"
Ø12"
Ø14"
Ø15"

Job Name:	Model: RB-D		
Location:			
Architect:			
Engineer:	Drawn By: CLJ	Date: 2-6-20	Rev. Date: 6-19-20
Contractor:	Rev. No.: 01 VD		Dwg. No.: E-14b