

**ROUND INDUSTRIAL CONTROL DAMPER**  
**Model HD-292 Level IV Rating**

**Design / Application**

Model **HD-292** is a Round Industrial Air Control Damper with a single skin 14 ga to 3/16" [4.76mm] thick steel blade. This model consist of a heavy duty flanged frame (14 ga to 10 ga steel) designed for direct attachment to the ductwork or equipment. **HD-292** model is ideal for balancing and/or shut off HVAC applications in the industrial systems with many options to meet your needs.

**STANDARD CONSTRUCTION**

(see table below for specifics)

- Frame: Carbon steel (above 12" [305mm] diameter)  
Galvanized steel (up to 12" [305mm] diameter)
- Blades: Steel, welded to shaft, reinforced as required
- Axles: Plated steel
- Bearings: Bronze sleeve 200° F [93°C] max  
Finish: 14 ga...Galv. steel 12 ga...Baked Powder Polyester
- Blade Stop: Single Point (not req'd with 1000°F [538°C] blade gasket)
- Seals: None

**SIZE LIMITATIONS:**

- Minimum Size: 4" [102mm] Diameter
- Maximum Size: 60" [1524mm] Diameter

**RATINGS:** (see page 2 for additional infomation)


- Velocity: up to 4000 fpm
- Pressure: up to 5 in [127mm] w.g.- differential pressure
- Temperature: Bronze Brg. -20°F ~ 200°F [-7°C~ 93°C] (Standard)  
Stainless Brg. 200°F ~ 1,000°F [93°C ~ 538°C] (Optional)

**OPTIONS**


- Rolled bar stop (1/2" x 1/4" [13mm x 6.35mm] bar thru 17", 1/2" x 1/2" bar over 17" [432mm, 13mm x 13mm bar over 432mm])
- Crosslinked closed cell blade seal with rolled bar (Max 190°F [88°C])
- Silica/Woven hi-temp, low leak, 1000° F [938°C] seal
- Bolt Holes  
 one side  both sides
- Bearings (see page 3)  
Type \_\_\_\_\_ Upgrade \_\_\_\_\_
- Hand Quadrant # \_\_\_\_\_
- Actuator Mounting Plate
- Stainless Steel Construction  
 304  316  Other \_\_\_\_\_

**AVAILABLE FINISHES:**

- Epoxy Powder
- Heresite Coat
- Zinc Rich Gray Primer

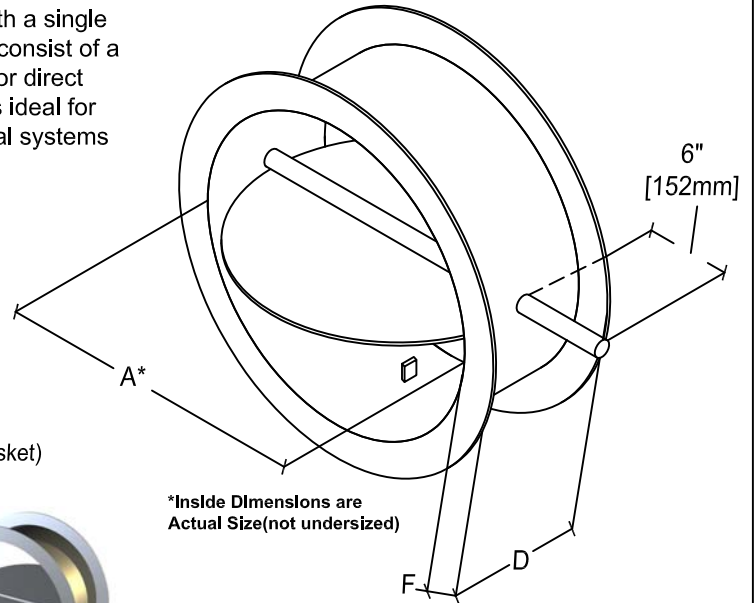

**BLADE/FRAME SECTIONS**

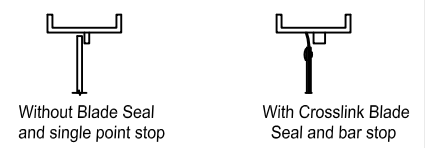



Diameter/I.D. (A")		Frame		Flange Web "F"	Axle Diameter	Blade Thickness
Above	Through	Depth "D"	Gauge			
3.99" [101]	12" [305]	6" [152]	14	1.25" [32]	0.5" [13]	14 ga
12" [305]	20" [508]	8" [203]	12	1.5" [38]	0.5" [13]	12 ga
20" [508]	24" [610]	8" [203]	12	1.5" [38]	0.75" [19]	12 ga
24" [610]	32" [813]	8" [203]	10	2.0" [51]	0.75" [19]	12 ga
32" [813]	40" [1016]	8" [203]	10	2.0" [51]	0.75" [19]	10 ga
40" [1016]	48" [1219]	8" [203]	10	2.0" [51]	1.0" [25]	10 ga
48" [1219]	54" [1371]	8" [203]	10	2.0" [51]	1.0" [25]	10 ga
54" [1371]	60" [1524]	8" [203]	10	2.0" [51]	1.0" [25]	3/16" (thk) [4.76]

Job Name:	<input type="checkbox"/> <b>MODEL HD-292</b>		
Location:			
Architect:	DRAWN BY:	DATE:	REV. DATE:
Engineer:	CLJ	12-16-01	10-24-13
Contractor:	REV. NO.	APPROVED BY:	DWG. NO.:
	18	BGT	D-3

## MODEL HD-292 PERFORMANCE DATA



### Pressure Drop Data

The HVAC system has many factors that effect its internal pressure losses. Dampers in the system is one contributing factor. These dampers have been tested per AMCA Standard 500-D, Fig. 5.3 (ductwork upstream and downstream). There are many influences the ductwork configuration that could effect the performance below such as other objects close to the dampers, elbows or turns near the dampers, internally mounted actuators, etc. This data will assist the designer in the analysis of the system.

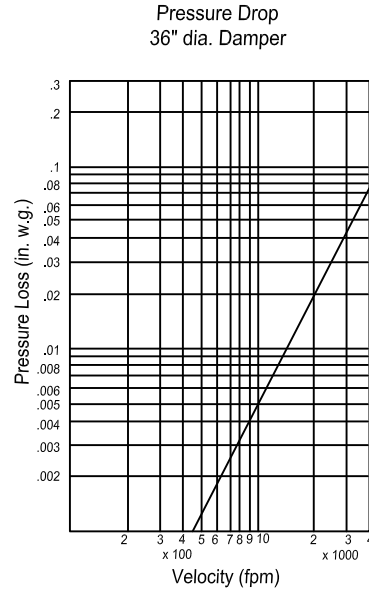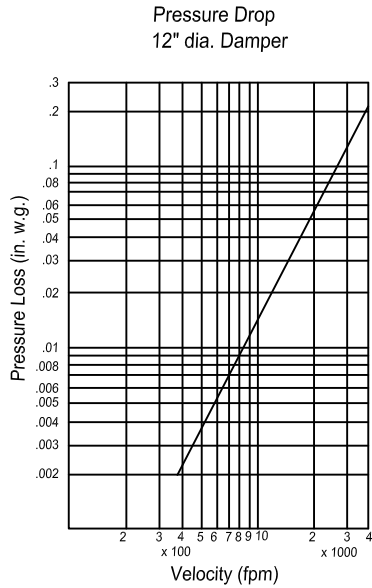

### Leakage Data

The damper leakage shown below is per AMCA Standard 500-D . The leakage shown is without seals (standard construction) and with seals, crosslink closed cell or silica/woven. The damper is in the fully closed position.

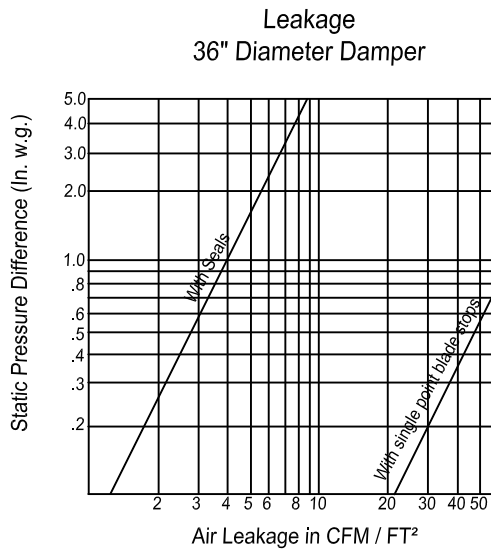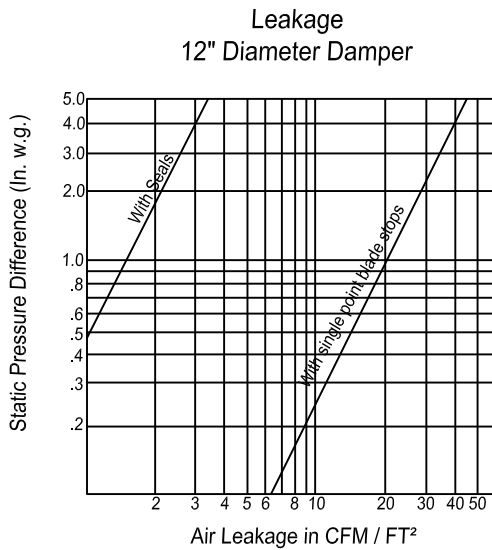


# FRAME CONSTRUCTION OPTIONS


Bolt Holes: Standard construction is **no** bolt holes. Optional: Bolt holes in one flange or both flanges

If bolt holes are required, United Enertech recommends either pattern shown on the drawings below. The patterns shown below "Parallel to Axle" or "Straddle Axle" drawings should be specified when ordering. The table below also gives further details and recommendations on our standard hole patterns. Should a custom hole pattern be required, then it must be approved and sent in at time of order.

Bolt Holes  
Parallel to Axle Centerline (P)



Bolt Holes  
Straddle Axle Centerline (S)




United Enertech Recommended Bolt Hole Pattern  
(Bolt Holes Parallel to Axle Centerline)

Diameter (I.D.)		Number of Holes	Mounting Hole Diameter "M"	Bolt Circle Diameter "C"	Degrees Between Holes
Above	Through				
4" [102]	5" [127]	4	3/8" [9.52]	*	90
5" [127]	8" [203]	6	3/8" [9.52]	*	60
8" [203]	11" [297]	6	7/16" [11]	*	60
11" [279]	18" [457]	8	7/16" [11]	*	45
18" [457]	24" [609]	12	7/16" [11]	*	30
24" [609]	36" [914]	16	7/16" [11]	*	22.5
36" [914]	58" [1473]	24	7/16" [11]	*	15
58" [1473]	60" [1524]	32	9/16" [14]	*	11.25

\* Bolt Circle Diameter = Damper Diameter + Flange Height + 1/4" [6.35mm]


Quantity	Max. Temp. (if higher than 250°F)	A Diameter	Bolt Hole Information			Placement (P or S)
			# of Holes	M Dia.	C Dia.	

# BEARING AND SHAFT OPTIONS




Type 1: Bronze Bushing

- Options:
- O-Ring Seal




Type 2: Stainless Steel Bushing

- Options:
- O-Ring Seal




Type 3: Two Hole Pressed Steel Sealed Bearing

- Options:
- O-Ring Seal
  - Bearing Cover
  - Packing Gland, Steel
  - Packing Gland, SS
  - Stainless Steel Insert




Type 4: Two Hole Cast Iron Bearing

- O-Ring Seal
- Bearing Cover
- Packing Gland, Steel
- Packing Gland, 304 SS
- High Temp (-30°F to 400°F)
- Graphite Ultra High Temp (-132°F to 750°F) Sealed
- Extreme High Temp (-132°F to 1000°F max) Sealed



Type 5: Two Hole 304 Stainless Steel Bearing

- Options:
- Hi Temp. 400° F
  - Hi Temp. graphite 750° F
  - Hi Temp. graphite 1000° F
  - Bearing Cover
  - Packing Gland, Steel
  - Packing Gland, 304 SS




Type 6: Two Hole Thermo Plastic Bearing


- Options:
- Bearing Cover
  - Packing Gland, Steel
  - Packing Gland, 304 SS

## **ACTUATOR OPTIONS**


Model **HD-292** has available many operators shown below that can be factory mounted by United Enertech. Consult factory for other operators not shown.




Hand Quadrant #2




Direct Drive Mounted  
Electric Actuators




Pull Chain and  
Worm Gear



Foot Mounted Actuators  
Such as Honeywell,  
Siebe/Barber Coleman



RCS Surepower TM



Pneumatic Diaphragm

### **SPECIFICATIONS:**

Industrial Round Dampers meeting the following specifications shall be furnished and installed where shown on drawings and described in the schedule. The damper frame shall consist of heavy gauge steel (14 -10 ga) rolled with a 1-1/4" minimum depth flange/web. The damper blade shall be of a single thickness, heavy gauge steel (14 ga < 12"D, 12"-32"D=12 ga, 33"-54"D=10 ga, 3/16" thick plate > 54"). The axle shall be continuous length of 1/2" dia. up to 20", 3/4" dia. up to 40" and 1" dia over 40". Bearings shall be of the bronze sleeve type to minimize wear. Also submitted with submittal package is the dampers performance data such as pressure drop, leakage, and temperature ratings. The damper shall be suitable for velocities up to 4000 fpm at a pressure differential of 5" wg. Damper shall be United Enertech Model HD-292 or equivalent.

### **ADDITIONAL INFORMATION THAT MAY BE ADDED TO SPECIFICATIONS:**

Damper shall be factory supplied with Blade Seals for low leakage. Blade Seals shall be Crosslinked Closed Cell (190°F maximum temperature) or Silica/woven Hi-temp (Up to 1000°F) {Specifier to choose one}. Damper leakage for a 36" diameter damper to be less than 4 cfm/ft<sup>2</sup> at 1" w.g. and less than 8 cfm/ft<sup>2</sup> at 4" w.g. shall be submitted for approval on manufacturer's submittal data. Bearing type upgrades may be specified. See United Enertech's Bearing Chart for variations.

