

SUBMITTAL DATA


STICKTITE TAKE-OFF


FEATURES AND CONSTRUCTION

BODY: One Piece Galvanized Steel. Body has selfadhesive backed galvanized flange mechanically fastened to body to facilitate quick and secure assembly of unit. Sure seal flange is 1" wide to insure a secure and positive sealed installation.

OPTIONAL SCOOP: One piece Galvanized Steel. Scoop is mechanically fastened to fitting body to assure a rigid assembly.

OPTIONAL DAMPER: One piece Galvanized Steel Damper is factory assembled to fitting. Damper is supplied with adjustable quadrant.

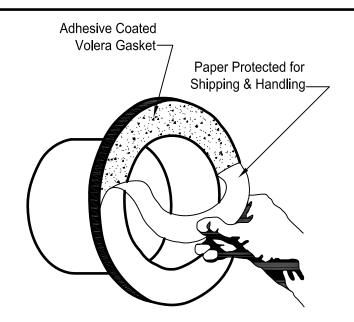

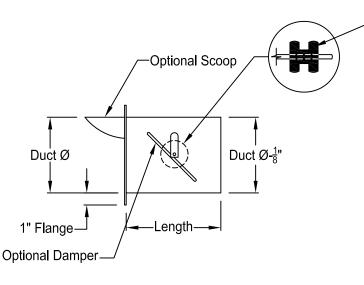


Optional Rubber Grommets (Air Tight)

Duct Ø	Gauge	Length
4" thru 10"	28	6"
12" thru 18"	26	6"

MOUNTING:

Peel paper away from gasket - stick in place Permanently secure with sheet metal screws




Optional:

Extended Quad for insulation standoff







w/ Scoop & Damper

Job Name:	☐ MODEL ST-	1 MODEL	☐ MODEL ST-3	
Location:	☐ MODEL ST-2 ☐ MODEL ST-4			
Architect:	DRAWN BY:	DATE:	REV. DATE:	
Engineer:	TBL	10-15-08	11-15-10	
Contractor:	REV. NO.	APPROVED BY: BGT	DWG. NO.: J-7	
Contractor.	12	DO1	J-1	