

Standard Construction:

Face Plate: 3/16" thick - 2" square holes, 1" fret bars, & 1" border

Sleeve: 3/16" thick cold rolled steel, 16" Length (std.)

Screen: 10 ga. -1/2" square holes on 5/8" centers

Angle: 1-1/2"x1-1/2"x1/4" steel (shipped loose)

Finish: Powder coated gray

All Welded Construction

Options:

A. Material

- Stainless Steel
- Aluminum

B. Backer Plate

- 3/16" thick steel
- 10 GA. Steel
- 12 GA. Steel

C. Sleeve

- 10 GA. Steel
- 12 GA. Steel
- Other _____

D. Damper


- Opposed Blade Damper (advise placement)

E. Angles


- Welded to one side of sleeve (advise placement)
- Welded & Filled corners-shipped loose
- Welded & Filled corners-welded to sleeve (advise placement)

F. Finish

- Baked Powder Epoxy-U.E Std. Color
- Crystal White-Baked Powder Polyester
- Other _____

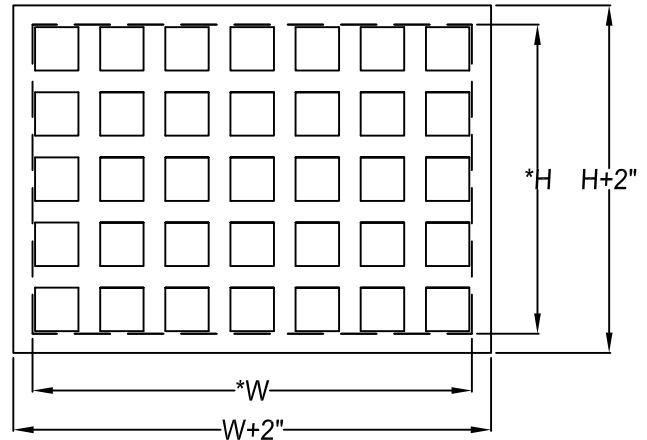

*Width & Height dimensions approx. 1/4" under listed size

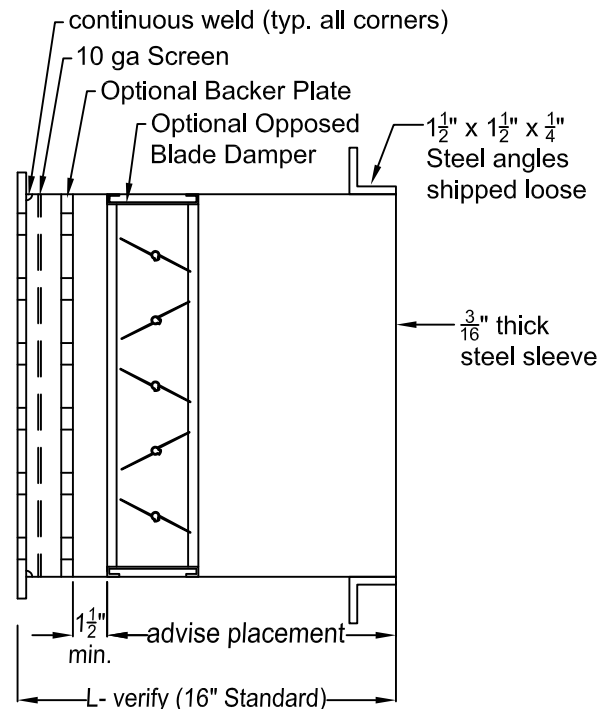

Due to continuing research United Enertech reserves the right to change specifications without notice.

Job Name:	<input type="checkbox"/> MODEL MS-FB		
Location:			
Architect:			
Engineer:	DRAWN BY: MHM	DATE: 12-17-06	REV. DATE: 2-21-11
Contractor:	REV. NO. 3	APPROVED BY: BGT	DWG. NO.: K-3