

Standard Construction:

Face Plates: 3/16" thick steel - 5/16" holes on 7/16" staggered centers with approx. 1" border

Sleeve: 3/16" thick cold rolled steel, 16" Length (std.)

Angle: 1-1/2"x1-1/2"x1/4" steel (welded to sleeve)

Finish: Powder coat gray

Tamper-Resistant Screws

All Welded Construction

Options:

A. Material


- Stainless Steel
- Aluminum

B. Sleeve


- 10 GA. Steel
- 12 GA. Steel
- Other _____

C. Finish

- Baked Powder Epoxy-U.E Std. Color
- Crystal White-Baked Powder Polyester
- Other _____

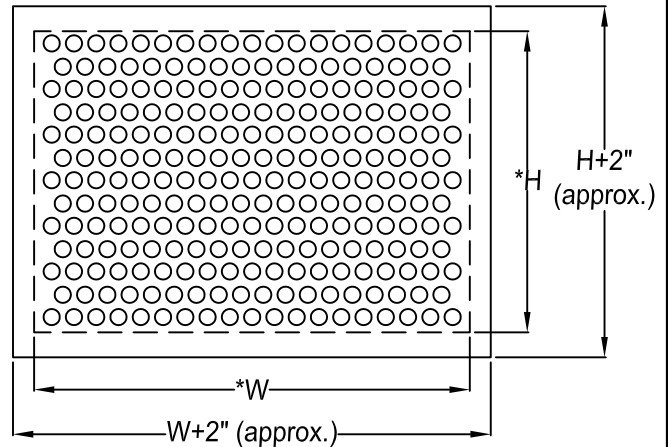

*Width & Height dimensions approx. 1/4" under listed size

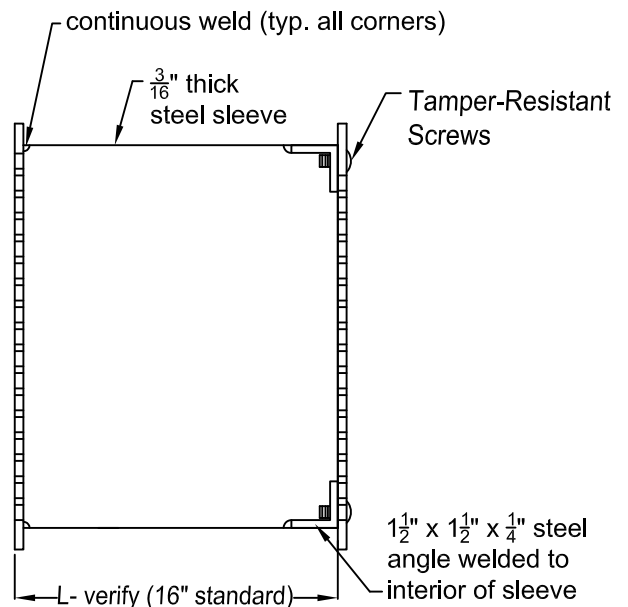

Due to continuing research United Enertech reserves the right to change specifications without notice.

Job Name:	<input type="checkbox"/> MODEL MS-P-4		
Location:			
Architect:			
Engineer:	DRAWN BY: MHM	DATE: 12-17-06	REV. DATE: 2-21-11
Contractor:	REV. NO. 3	APPROVED BY: BGT	DWG. NO.: K-7