

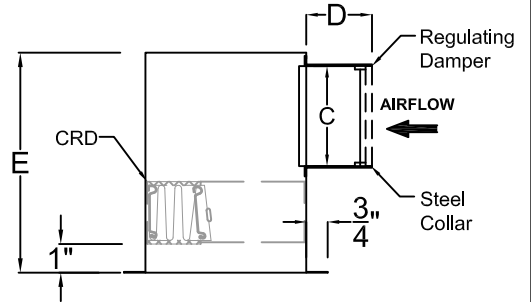
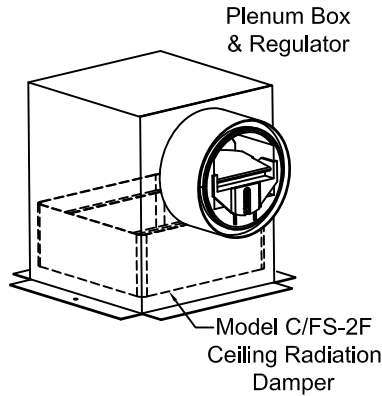


Application and Design:

Precision/Flow™ System CRB-10-S-CD is a factory set constant volume control damper for ceiling applications composed of fire retardant plastics. It contains a self regulating airfoil damper blade and spring piston design to maintain a factory preset air volume flow and includes a ceiling radiation damper. These dampers are designed to operate in a pressure range of 0.20" w.g. to 0.80" w.g. The regulators automatically adjust for variable duct pressures caused by building pressure, thermal stack effect, dust build-up, etc. This system also creates a very cost effective answer to balancing air systems for HVAC supply ventilation in high rise buildings, without the requirement for on-site balancing, electrical / pneumatic controls or sensors. System CRB-10-S-CD requires no standard maintenance under normal conditions.

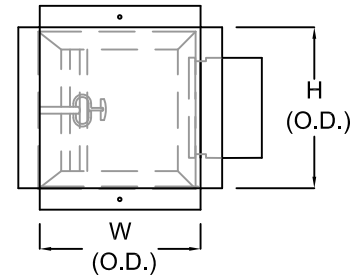

RIGHT SIDE VIEW

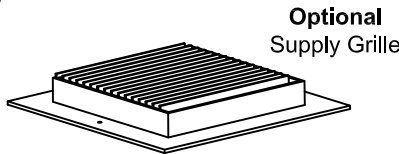

BOTTOM VIEW

STANDARD CONSTRUCTION:

- CRB Plenum: 20 GA Galvanized Steel
- Regulating Damper: UL94V-0 ABS Plastic
UL 2043 classified, UL File #R38307
- C/FS-2F ceiling radiation damper
(UL-555C, R25411)

OPTIONS:

- Add Exhaust Grille
 - Removable Grille (No Screw Holes)
Wedged in Via Stainless Spring Steel
- Grille and Box Powder Coated with Anti-Microbial Agent Added
- Additional Box Depth

Range of Operation Static Pressure	
Minimum	0.20" w.c.
Maximum	0.80" w.c.

Box Size	Damper (nominal)	W	H	C	D	E
6x4 (152.4x101.6)	4 (101.6)	6 (152.4)	4 (101.6)	3.8 (96.5)	2.4 (61)	8.8(223.5)
6x6 (152.4x152.4)	4 (101.6)	6 (152.4)	6 (152.4)	3.8 (96.5)	2.4 (61)	8.8(223.5)
6x6 (152.4x152.4)	5 (127)	6 (152.4)	6 (152.4)	4.5 (114.3)	3 (76.2)	9.5(241.3)
8x8 (203.2x203.2)	4 (101.6)	8 (203.2)	8 (203.2)	3.8 (96.5)	2.4 (61)	8.8(223.5)
8x8 (203.2x203.2)	5 (127)	8 (203.2)	8 (203.2)	4.5 (114.3)	3 (76.2)	9.5(241.3)
8x8 (203.2x203.2)	6 (152.4)	8 (203.2)	8 (203.2)	5.5 (139.7)	3.2 (81.3)	10.5(266.7)
10x10 (254x254)	6 (152.4)	10 (254)	10 (254)	5.5 (139.7)	3.2 (81.3)	10.5(266.7)
10x10 (254x254)	8 (203.2)	10 (254)	10 (254)	7.2 (182.9)	3.2 (81.3)	12.2(309.9)
12x12 (304.8x304.8)	8 (203.2)	12 (304.8)	12 (304.8)	7.2 (182.9)	3.2 (81.3)	12.2(309.9)
12x12 (304.8x304.8)	10 (254)	12 (304.8)	12 (304.8)	8.9 (226.1)	4.6 (116.8)	13.9(353.1)
14x14 (355.6x355.6)	10 (254)	14 (355.6)	14 (355.6)	8.9 (226.1)	4.6 (116.8)	13.9(353.1)

Consult factory for sizes not shown

Sizes in inches (millimeters)

Job Name: _____
 Location: _____
 Architect: _____
 Engineer: _____
 Contractor: _____

Precision/Flow™ SYSTEM CRB-10-S-CD
 (Constant Volume Regulator for Supply Applications)


DRAWN BY: CS	DATE: 10-12-16	REV. DATE:	REV. NO.	APPROVED BY: CJ	DWG. NO.: L-4e
-----------------	-------------------	------------	----------	--------------------	-------------------



SYSTEM CR PERFORMANCE DATA


The charts to the right, show the approximate constant volume airflow through the damper at a given pressure differential. The ideal pressure differential across the damper to provide the desired factory set constant airflow volume is between 0.2" w.g.(50 Pa) and 0.8"w.g. (200 Pa). As shown if the pressure across the damper falls below 0.2" w.g. (50 Pa) then the airflow volume will be reduced. Likewise if the pressure across the damper increases to over 0.8" w.g. (200 Pa), then the airflow volume will be increased. Please note that these dampers are factory set to the specific airflow. They can be field modified to another desired airflow. The graphs shown are averages and can vary by 5%. The maximum air temperature is 140°F (60°C). The charts shown are at 68°F (20°C) and 1 atmosphere pressure.

Damper size:
4" [101.6mm]
nominal
(100m)

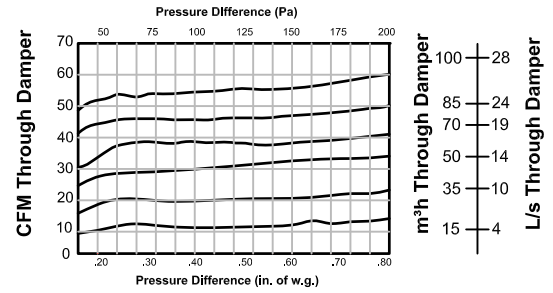


Note: Dampers are pre-set at the factory for the specified cfm

Damper size:
5" [127mm]
nominal
(125 mm)

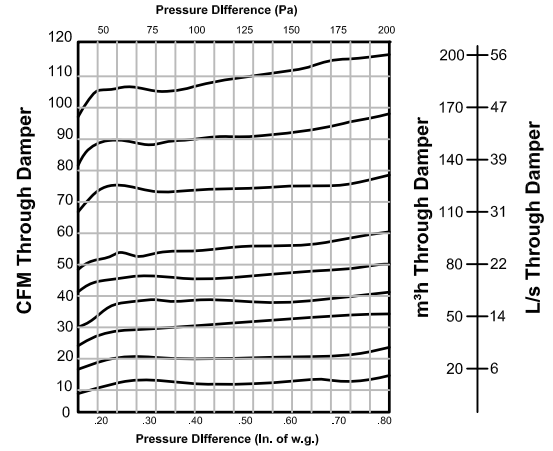


Note: Dampers are pre-set at the factory for the specified cfm

Damper size:
6" [152.4mm]
nominal
(150 mm)

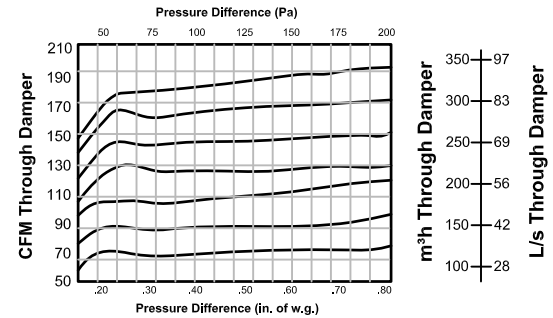


Note: Dampers are pre-set at the factory for the specified cfm

Damper size:
8" [203.2mm]
nominal
(200 mm)

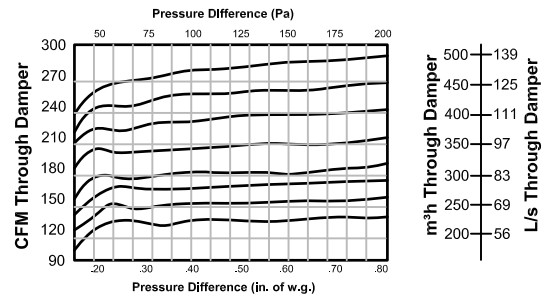

Note: Dampers are pre-set at the factory for the specified cfm

Damper size:
10" [254mm]
nominal
(250 mm)

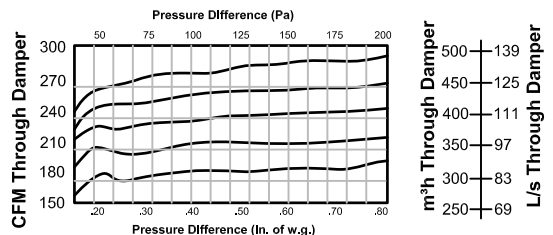

Note: Dampers are pre-set at the factory for the specified cfm

Range of Operation Static Pressure	
Minimum	.2" w.g.
Maximum	.8" w.g.

DRAWN BY: BR/CLJ	DATE: 11-26-14	REV. DATE:	REV. NO.	APPROVED BY: CLJ
---------------------	-------------------	------------	----------	---------------------