

## MODEL SFL-2

## 2" [51mm] FIXED STEEL LOUVER

### STANDARD CONSTRUCTION:


- FRAME:** 18 ga. galvanized steel, 2.13" [54mm] deep
- BLADES:** 18 ga. galvanized steel, positioned at 45° angles on approximately 3.5" [89mm] centers.
- BIRDSCREEN:** 0.50" x 0.050" [12.70mm x 1.27mm] Expanded flattened alum. in removable frame. Screen is mounted on inside (rear)
- FINISH:** mill galvanized
- MINIMUM SIZE:** 8"w x 10"h [203mm x 254mm]
- MAXIMUM SIZE:** 96"w x 72"h [2438mm x 1829mm]  
Larger sizes made in multiple sections.

### OPTIONS:

- ☐ Flanged Frame (1.5" [38mm] std.)
- ☐ Custom Flange (1", 2", or 3") [25mm, 51mm, or 76mm]
- ☐ Extended Sill
- ☐ Insect Screen (Other Screens Available, See Screen Page)
- ☐ Filter Racks (no screen)
- ☐ Security Bars
- ☐ Hinged Sub Frame
- ☐ Welded Construction
- ☐ Blank-off, Steel, non-insulated, no screen, non-removeable
- ☐ Blank-off, Steel, non-insulated, with bird screen or insect screen
- ☐ Blank-off, Steel, insulated double wall, with bird screen, removable
- ☐ Blank-off, Steel, insulated double wall, no screen, non-removeable
- ☐ Aluminum Construction
- ☐ 304 Stainless Steel Const.   ☐ 316 Stainless Steel Const.

### AVAILABLE FINISHES:

- ☐ Durable Polyester Powder (AAMA 2604)
- ☐ Epoxy Powder
- ☐ Zinc Rich Gray Primer

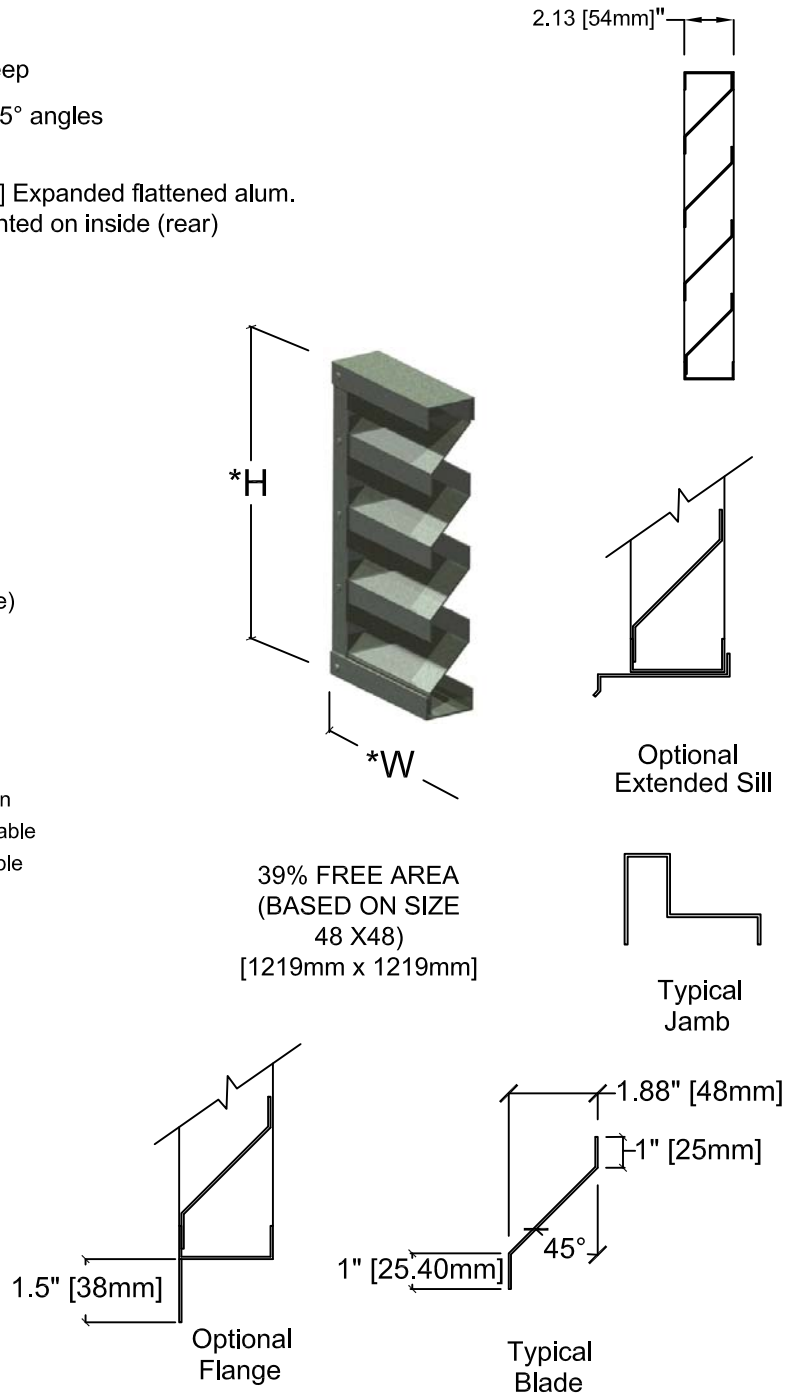

\*Width and Height dimensions are approximately 1/4" [6.35mm] under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.



3005 South Hickory Street  
Chattanooga, Tennessee 37407  
Tel: (423) 698-7715  
Fax: (423) 698-6629  
www.unitedenertech.com

### MODEL SFL-2 (2" FIXED STEEL LOUVER)

DRAWN BY:	DATE:	REV. DATE:	REV. NO.	APPROVED BY:	DWG. NO.:
MHM	4-2-10	4-4-13	2	BGT	A-13