

MODEL SFL-D-6

6" [152mm] FIXED/DRAINABLE STEEL LOUVER

STANDARD CONSTRUCTION:

FRAME: 18 ga. galvanized steel, 6.13" [156mm] deep

BLADES: Drainable, 18 ga. galvanized steel, positioned at 45° angles on approximately 5.88" [149mm] centers.




BIRDSCREEN: 0.50" x 0.050" [12.70mm x 1.27mm] Expanded flattened alum. in removable frame. Screen is mounted on inside (rear)

FINISH: Mill Galvanized

MINIMUM SIZE: 8"w x 12"h [203mm x 305mm]

MAXIMUM SECTION SIZE: 96"w x 72"h [2438mm x 1829mm]
Larger sizes made in multiple sections.

6.13 [156mm]

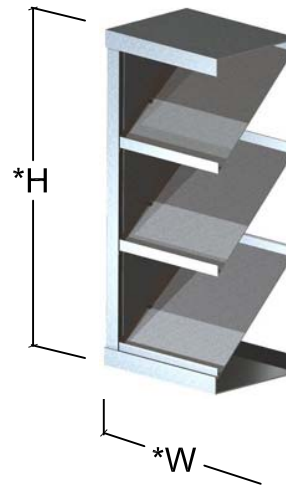
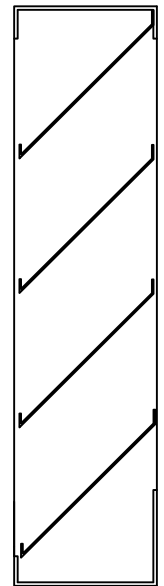


OPTIONS:

- ☐ Flanged Frame (1.5" [38mm] std.)
- ☐ Custom Flange (1", 2" , or 3") [25mm, 51mm, 76mm]
- ☐ Extended Sill
- ☐ Insect Screen (Other Screens Available, See Screen Page)
- ☐ Filter Racks (no screen)
- ☐ Security Bars
- ☐ Hinged Sub Frame
- ☐ Welded Construction
- ☐ Blank-off, Steel, non-insulated, no screen, non-removeable
- ☐ Blank-off, Steel, non-insulated, with bird screen or insect screen
- ☐ Blank-off, Steel, insulated double wall, with bird screen, removable
- ☐ Blank-off, Steel, insulated double wall, no screen, non-removeable
- ☐ Aluminum Construction
- ☐ 304 Stainless Steel Const. ☐ 316 Stainless Steel Const.
- ☐ 316L Stainless Steel Const.

AVAILABLE FINISHES:

- ☐ Durable Polyester Powder (AAMA 2604)
- ☐ Epoxy Powder
- ☐ Zinc Rich Gray Primer

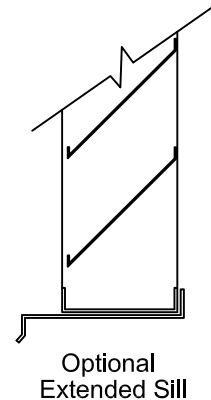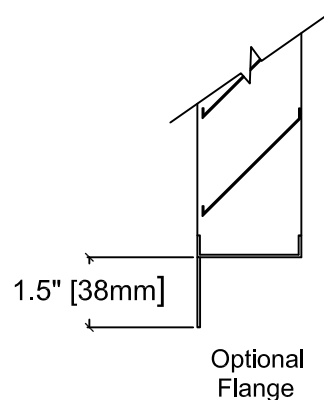

*W & H dimensions furnished approximately 1/4" [6.35mm] under size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.



3005 South Hickory Street
Chattanooga, Tennessee 37407
Tel: (423) 698-7715
Fax: (423) 698-6629
www.unitedenertech.com

MODEL SFL-D-6 (6" FIXED/DRAINABLE STEEL LOUVER)

DRAWN BY:	DATE:	REV. DATE:	REV. NO.	APPROVED BY:	DWG. NO.:
MHM	4-1-10	4-4-13	2	BGT	A-12

SUGGESTED SPECIFICATION

Furnish and install louver as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary drainable type with drain gutters in each blade and downspouts in jambs and mullions. Stationary blades shall be contained within a 6.13" deep frame. Louver components (heads, jambs, sills, blades, and mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 30 lbs. per sq. ft. (equivalent of 110 mph wind).

PERFORMANCE DATA

SFL-D-6 FREE AREA IN SQ. FT.

Louver Height Inches	Width - Inches															Louver Height Inches
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	
12	0.26	0.41	0.57	0.72	0.88	1.03	1.19	1.34	1.50	1.65	1.81	1.96	2.12	2.27	2.43	12
18	0.51	0.82	1.13	1.44	1.75	2.06	2.37	2.68	2.99	3.30	3.61	3.92	4.23	4.54	4.85	18
24	0.77	1.23	1.70	2.16	2.63	3.09	3.56	4.02	4.49	4.95	5.42	5.88	6.35	6.81	7.28	24
30	1.02	1.64	2.26	2.88	3.50	4.12	4.74	5.36	5.98	6.60	7.22	7.84	8.46	9.08	9.70	30
36	1.28	2.05	2.83	3.60	4.38	5.15	5.93	6.70	7.48	8.25	9.03	9.80	10.58	11.35	12.13	36
42	1.53	2.46	3.39	4.32	5.25	6.18	7.11	8.04	8.97	9.90	10.83	11.76	12.69	13.62	14.55	42
48	1.79	2.87	3.96	5.04	6.13	7.21	8.30	9.38	10.47	11.55	12.64	13.72	14.81	15.89	16.98	48
54	2.04	3.28	4.52	5.76	7.00	8.24	9.48	10.72	11.96	13.20	14.44	15.68	16.92	18.16	19.40	54
60	2.30	3.69	5.09	6.48	7.88	9.27	10.67	12.06	13.46	14.85	16.25	17.64	19.04	20.43	21.83	60
66	2.55	4.10	5.65	7.20	8.75	10.30	11.85	13.40	14.95	16.50	18.05	19.60	21.15	22.70	24.25	66
72	2.81	4.51	6.22	7.92	9.63	11.33	13.04	14.74	16.45	18.15	19.86	21.56	23.27	24.97	26.68	72

Beginning point of WATER PENETRATION
is
1007 fpm
free area velocity at .01 oz. of water penetration

The louver system should be designed with a reasonable safety factor for louver performance. To ensure protection from water carryover, design with a performance level somewhat below maximum desired pressure drop and .01 oz./sq.ft. of water penetration.

