

**Conventional Roof Curb**

**Model: UCC-2**

Conventional Roof Curb

Additional Options:




- 1.
- 2.
- 3.
- 4.

**Standard Construction:**

One-piece curb with 18 ga. Galvanized steel shell and baseplate; 8" [203mm] minimum height, 2 x 2 [51 x 51mm] pressure treated wood nailer, insulated, internal angle reinforcing with welded corners, 1" [25mm] mounting flange. For non-insulated roof decks.

**AVAILABLE FINISHES:**

- ☐ Durable Polyester Powder (AAMA 2604)
- ☐ Epoxy Powder

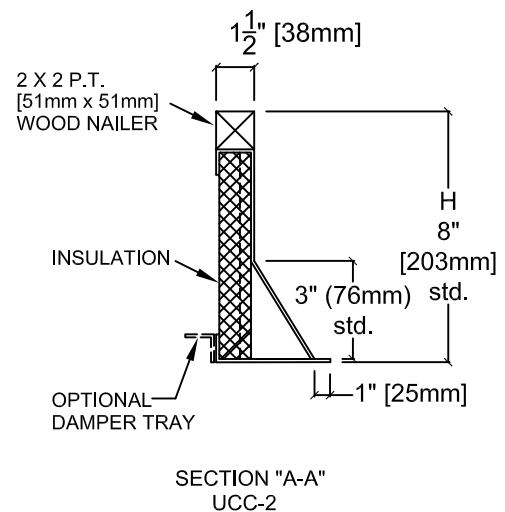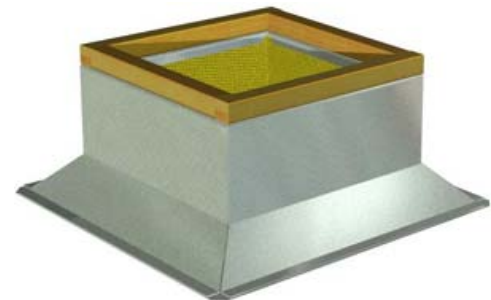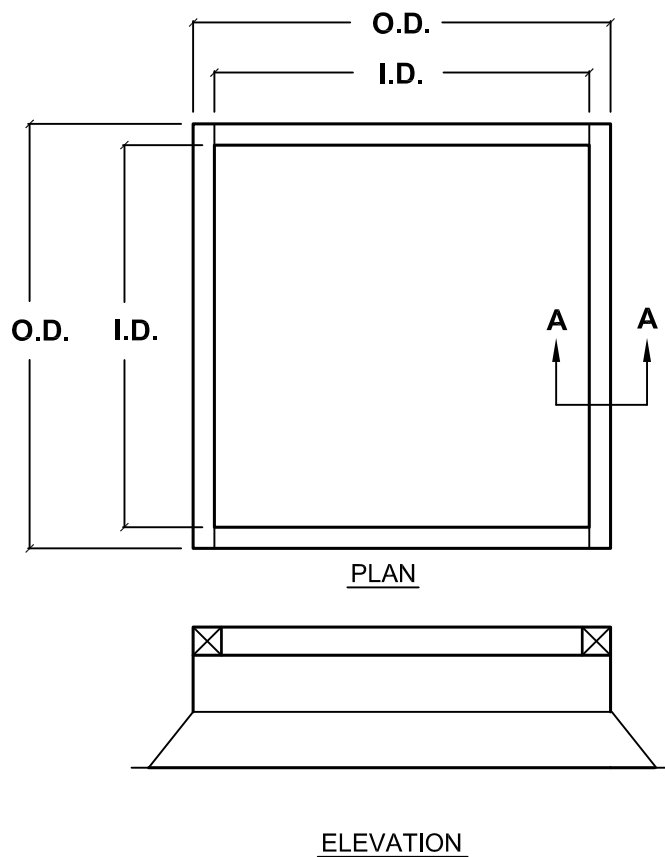

NOTE: Due to continuing research, United Enertech reserves the right to change specifications without notice.

Qty.	I.D.	O.D.	H	Roof Slope	Tag- Description
DRAWN BY: CLJ	DATE: 8-3-06	REV. NO. 7	REV. DATE: 4-15-14	APPROVED BY: CBY	DWG. NO.: <b>M-2</b>