

Conventional Roof Curb

Model: UCC-3

Conventional Roof Curb

Additional Options:



- 1.
- 2.
- 3.
- 4.

Standard Construction:

One-piece curb with 18 ga. Galvanized steel shell and baseplate; 12" [304.8mm] minimum height, 2 x 2 [50.8 x 50.8mm] pressure treated wood nailer, insulated, internal angle reinforcing with welded corners. 2" [50.8mm] mounting flange. Self flashing for single-ply EPDM roofing.

AVAILABLE FINISHES:

- ☐ Durable Polyester Powder (AAMA 2604)
- ☐ Epoxy Powder

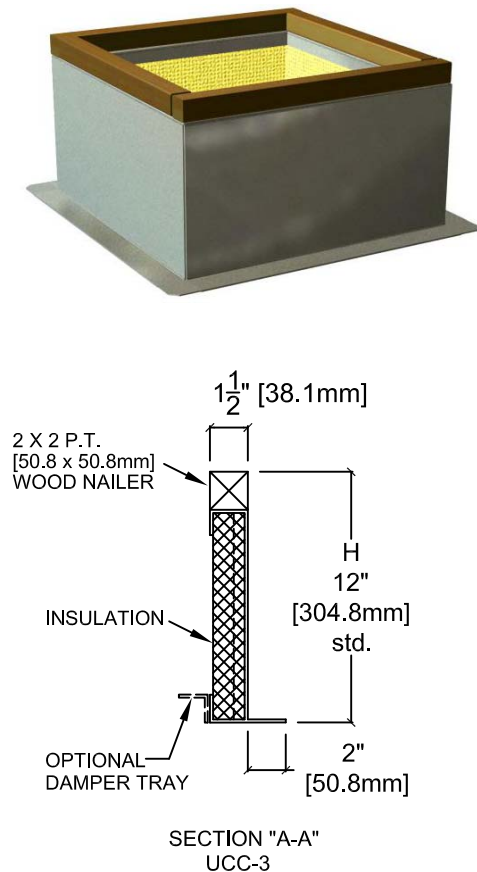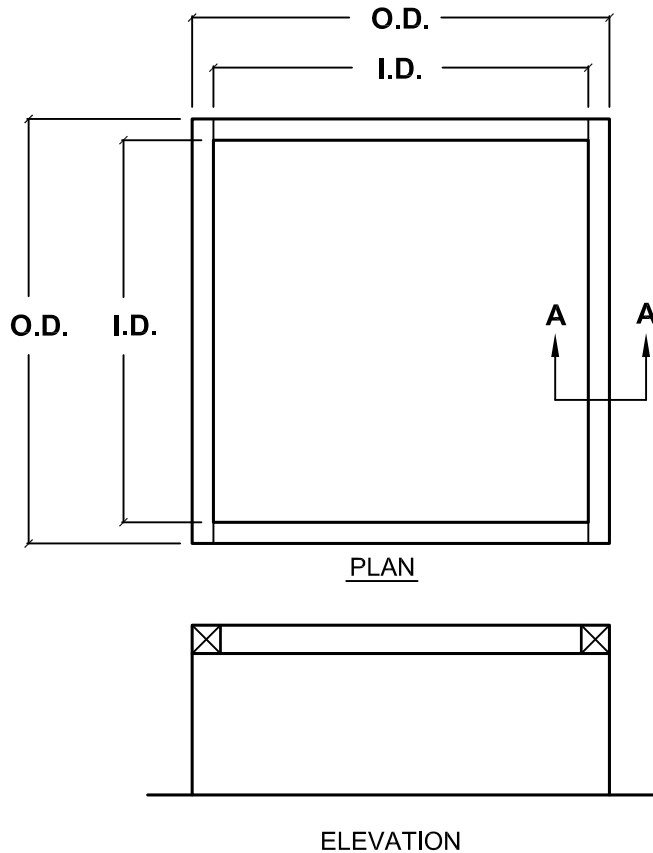

NOTE: Due to continuing research, United Enertech reserves the right to change specifications without notice.

Qty.	I.D.	O.D.	H	Roof Slope	Tag- Description
DRAWN BY: CLJ	DATE: 8-3-06	REV. NO. 7	REV. DATE: 4-15-14	APPROVED BY: CBY	DWG. NO.: M-3