

Conventional Roof Curb

Model: UCC-5

Conventional Roof Curb

Additional Options:


- 1.
- 2.
- 3.
- 4.

Standard Construction:


One-piece curb with 18 ga. Galvanized steel shell, 12" [304.8mm] minimum height. 1 x 4 [25.4 x 101.6mm] pressure treated wood nailer, non- insulated with welded corners, 3" [76.2mm] mounting flange.

AVAILABLE FINISHES:



- ☐ Durable Polyester Powder (AAMA 2604)
- ☐ Epoxy Powder

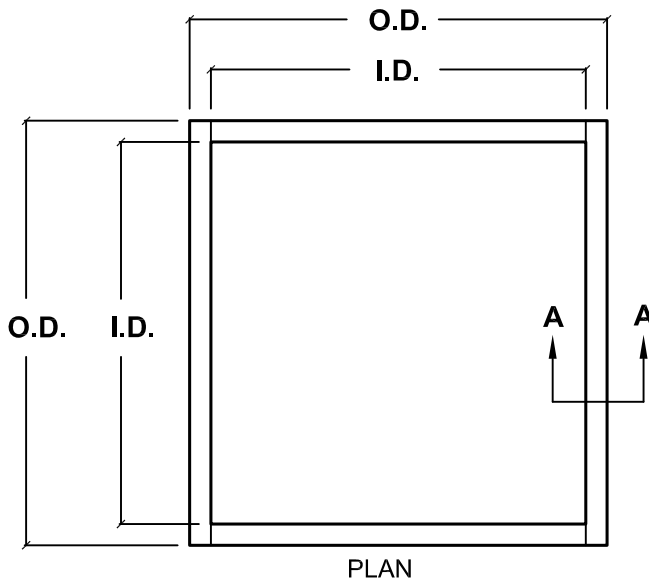

PLAN

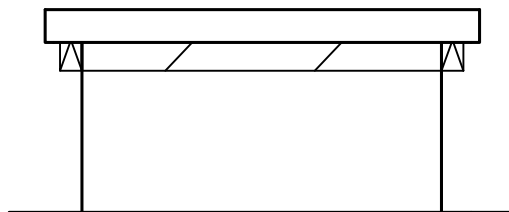

ELEVATION

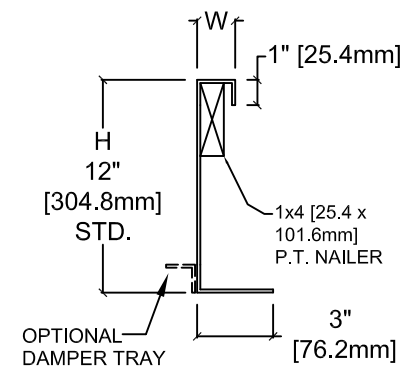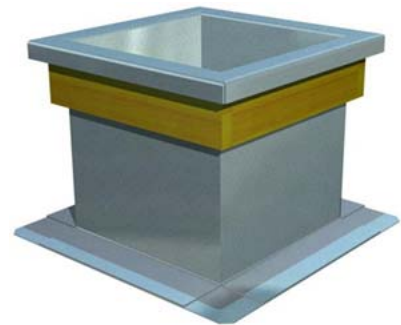

SECTION "A-A"
UCC-5

NOTE: Due to continuing research, United Enertech reserves the right to change specifications without notice.

Qty.	I.D.	O.D.	H	W	Roof Slope	Tag- Description
DRAWN BY: SRB	DATE: 8-4-06	REV. NO. 7	REV. DATE: 4-15-14	APPROVED BY: CBY	DWG. NO.: M-4	