


MODEL XL-4

4" [102mm] Deep Acoustical Louver

STANDARD CONSTRUCTION:

- Frame:** 4" [102mm] Deep x 18 ga. galvanized steel
- Blade (air side):** 18 ga. galvanized steel
- Blade (noise side):** 20 ga. galvanized perforated steel
- Absorbent fill:** Advanced Microfibers composed of Polyester and Polyolefin
- Screen:** 0.50" x 0.050" [12.70mm x 1.27mm] flattened aluminum screen mounted in a removable frame.
- Minimum Louver Size:** 8"w x 8"h [203mm x 203mm]
- Maximum Louver Size:** 48"w x 120"h [1219mm x 3048mm]
Louvers more than 48"w [1219mm] are built in mult. sections

FREE AREA:
39% (based on size 48" x 48") [1219mm x 1219mm]

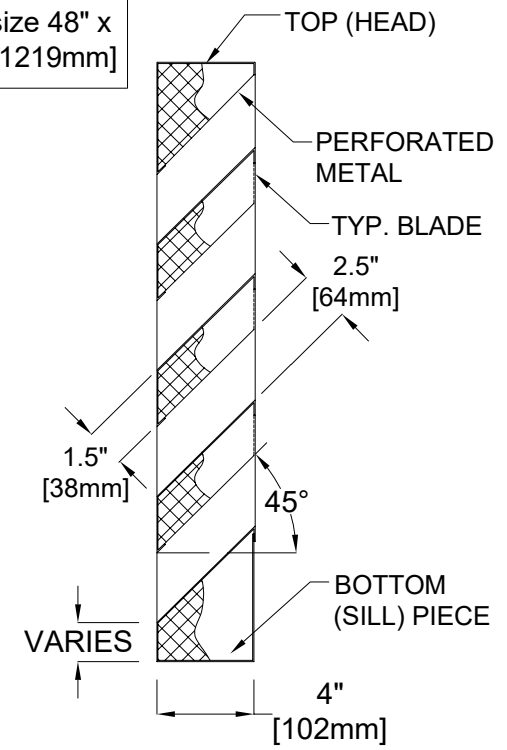


OPTIONS:

- Flanged Frame (1.50" std.) [38mm]
- Custom Flange (1", 2" , or 3") [25mm, 51mm or 76mm]
- Extended Sill
- Insect Screen (Other Screens Available, See Screen Page)
- Filter Racks (no screen)
- Security Bars
- Hinged Sub Frame
- Welded Construction
- Blank-off, Steel, non-insulated, no screen, non-removeable
- Blank-off, Steel, non-insulated, with bird screen or insect screen
- Blank-off, Steel, insulated double wall, with bird screen, removable
- Blank-off, Steel, insulated double wall, no screen, non-removeable
- Aluminum Construction
- 304 Stainless Steel Const. 316 Stainless Steel Const.

Available Finishes:

- Durable Polyester Powder (AMA 2604)
- Epoxy Powder
- Zinc Rich Gray Primer

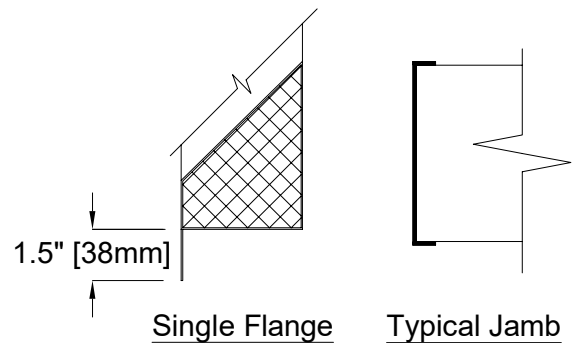

Octave Band HZ	63	125	250	500	1000	2000	4000	8000
Noise Reduction DB	8	9	9	11	14	19	15	19

*Width and Height dimensions are approximately 1/4" [6.35mm] under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.



3005 South Hickory Street
Chattanooga, Tennessee 37407
Tel: (423) 698-7715
Fax: (423) 698-6629
www.unitedenertech.com

MODEL XL-4 (4" Deep Acoustical Louver)

DRAWN BY: MHM	DATE: 4-23-10	REV. DATE: 4-25-13	REV. NO. 3	APPROVED BY: BGT	DWG. NO.: A-39
------------------	------------------	-----------------------	---------------	---------------------	--------------------------

ACOUSTICAL DATA

XL-4

Sound Transmission Class (STC)

This is a numerical two-digit figure rating derived from a standardized performance test made in accordance with ASTM E90-90 (Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions) and ASTM E413-87 (Standard Classification for Determination of Sound Transmission Class). The number is used in evaluating the effectiveness of an assembly in isolating or reducing airborne sound transmission. Acoustic performance ratings have been determined by an AMCA Laboratory.


Outdoor Indoor Transmission Class (OITC)

ASTM E1332 and ASTM E966 procedures are used to determine the OITC rating of building facades relative to ground or air transportation noise.

Octave Band HZ	63	125	250	500	1000	2000	4000	8000
Noise Reduction DB	8	9	9	11	14	19	15	19

PERFORMANCE DATA

WATER PENETRATION

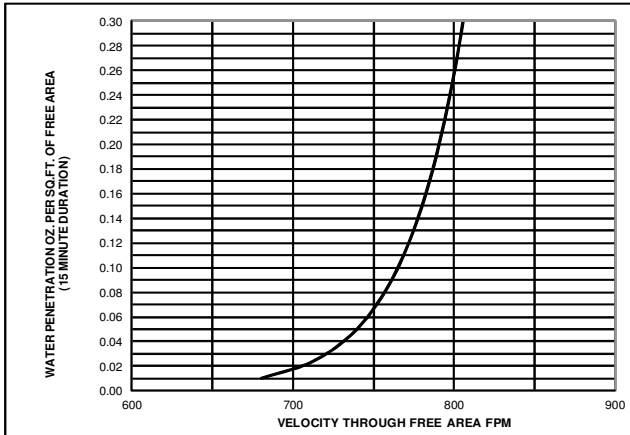


AMCA Standard 500-L provides a reasonable basis for testing and rating louvers. Testing to AMCA Standard 500-L is performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers must operate.

The louver system should be designed with a reasonable safety factor for louver performance. To ensure protection from water carryover, design with a performance level somewhat below maximum desired pressure drop and .01 oz./sq. ft. of water penetration.

Beginning point of WATER PENETRATION
is
680 fpm
free area velocity at .01 oz. of water penetration

Standard Air-.075 lb/ft³

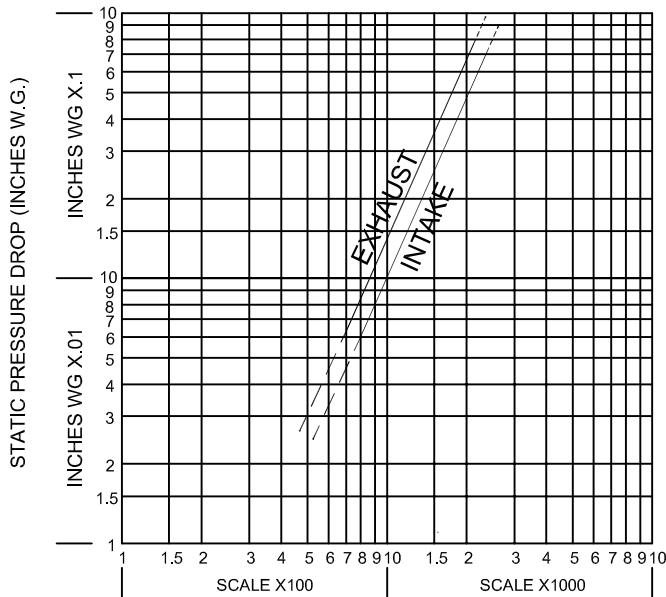

Louver Height Inches	Louver Width In Inches							Louver Height Inches
	12	18	24	30	36	42	48	
12	0.21	0.34	0.46	0.59	0.71	0.84	0.96	12
18	0.40	0.64	0.88	1.12	1.36	1.60	1.84	18
24	0.59	0.94	1.30	1.65	2.00	2.36	2.71	24
30	0.78	1.25	1.71	2.18	2.65	3.12	3.58	30
36	0.97	1.55	2.13	2.71	3.30	3.88	4.46	36
42	1.16	1.85	2.55	3.25	3.94	4.64	5.33	42
48	1.35	2.16	2.97	3.78	4.59	5.40	6.21	48
54	1.54	2.46	3.39	4.31	5.23	6.16	7.08	54
60	1.73	2.77	3.80	4.84	5.88	6.91	7.95	60
66	1.91	3.06	4.20	5.35	6.50	7.64	8.79	66
72	2.08	3.34	4.59	5.84	7.09	8.34	9.59	72
78	2.26	3.61	4.97	6.32	7.68	9.03	10.39	78
84	2.43	3.89	5.35	6.81	8.27	9.73	11.19	84
90	2.61	4.17	5.73	7.30	8.86	10.42	11.99	90
96	2.78	4.45	6.11	7.78	9.45	11.12	12.78	96
102	2.95	4.72	6.50	8.27	10.04	11.81	13.58	102
108	3.13	5.00	6.88	8.75	10.63	12.51	14.38	108
114	3.33	5.33	7.33	9.33	11.33	13.33	15.33	114
120	3.52	5.64	7.75	9.86	11.98	14.09	16.20	120

FREE AREA VELOCITY (FT/MIN)
TEST SIZE: 48" X 48"
Based on STANDARD AIR- .075 lb. per cubic foot.
Ratings do not include the effects of screen.